

BABY LOCK SEWING ACCESSORIES

Open Toe Foot

(BL66-OT)

Instructions

The Baby Lock open toe foot is the perfect foot for doing appliqué or stitching around intricate areas of decorative stitches. You will notice that this foot has a larger groove cut out of the underside to accommodate thicker stitches and decorative threads.

When doing appliqué on your Baby Lock machine, you have several stitches from which to choose. To do traditional appliqué, select the zig zag stitch. For a more decorative or hand appliqué look, use the appliqué stitch that is built in your Baby Lock machine. The stitch will look like this:




Machine Settings:

Stitch	#34 to #38
Stitch Length	2.0 – 3.0 mm
Stitch Width	3.5 – 6.0 mm


Refer to machine guide for setting conversion and recommendations.

INSTRUCTIONS:

1. Position the appliqué on fabric with fabric glue, fusible iron-on stabilizer or basting stitches. (When using fabric with frayed edges for the appliqué, press under 1/4 inch on all the edges.)
2. Sew along the edge of the appliqué. Align the straight part of the stitch with the edge of the appliqué to give this project a hand-made appearance.
3. When pivoting corners, lower the needle in the right side of

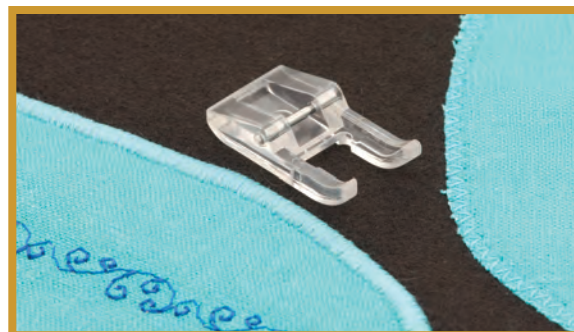

the stitch. Raise the presser foot and use the needle to pivot and turn the fabric.

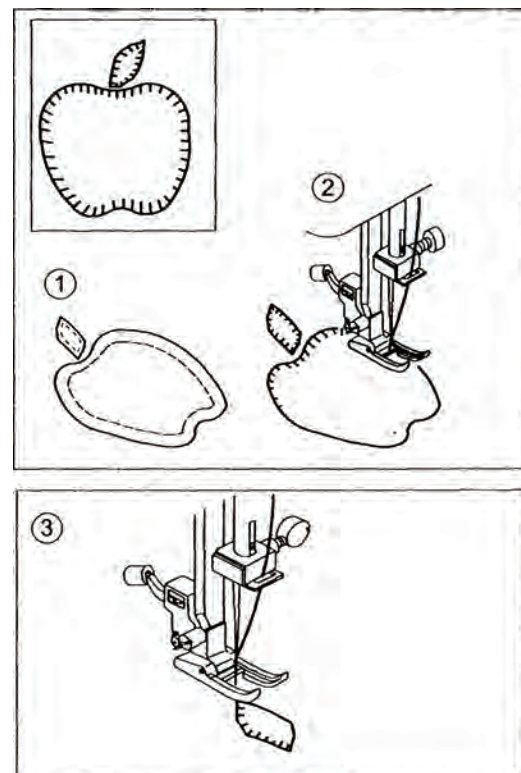

FOR THE LOVE OF SEWING