


BABY LOCK SEWING ACCESSORIES

Overcasting Foot

(BL66-OF)

Instructions

The overcasting foot delivers a consistent and accurate overcasting stitch for a great serged effect. Thread is locked around the edge of fabric, perfectly aligned with the edge, to prevent fabric from raveling.

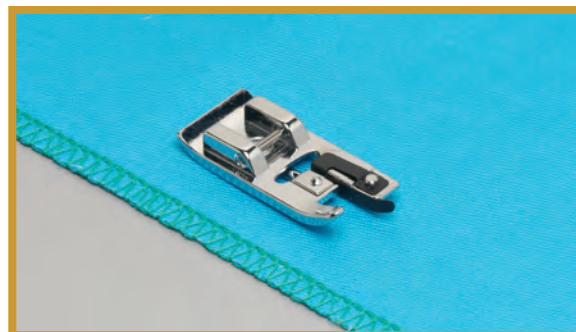

Machine Settings:

Stitch	#06, # 18, #19, #37
Stitch Length	2.0 – 3.0 mm
Stitch Width	5.0 - 6.5 mm


Note: Setting may vary depending on stitch selected. Refer to machine guide for setting conversion and recommendations.




INSTRUCTIONS:

Position the fabric against the guide plate of the overcasting foot so that the needle falls near the edge of the fabric.

1. Overcasting stitches (width 5.0 - 6.5) are used for preventing raveling of fabrics.

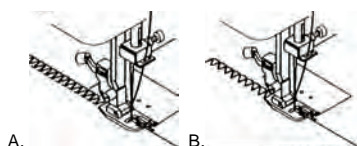


2. Some stitches can sew overcasting and regular stitches at the same time. Therefore, it is convenient for sewing easy to ravel and stretch fabrics.



Caution: To prevent accidents, the overcasting foot should be used for sewing patterns 06,18,19,and 37 only and do not change the stitch width narrower than 5.0 It is possible that the needle could hit the presser foot and break when sewing other patterns and width.

3. Use a narrower zig zag width for thin or fine fabrics.
4. Adjust the width and length of stitch 06 for various weights of knit and stretch fabrics.
5. For 1/2 inch seam allowances, sew then trim the excess fabric close to the stitching. Be careful not to cut the thread when cutting the fabric edge.



FOR THE LOVE OF SEWING