

BABY LOCK

SASHIKO ACCESSORIES

Braiding Guide

(BLQK-BG)

Instructions

Small sewing braids can be guided in front of the foot and stitched down by the machine, much like a braiding foot. Perfect for small, flat trims.

INSTRUCTIONS:

Fabrics used:


Lightweight and medium weight fabrics

Tapes used:

Lightweight flat tapes and braids or serger chain created by an overlock or cover stitch.

For best results, round cords and yarns are not recommended.

1. Loosen the fixing screw located on the back of the presser foot holder.
2. Insert the straight end of the braiding guide into the right side of the hole opening.

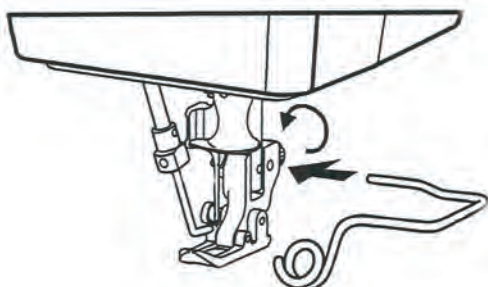

3. Adjust the guide to align the spiral opening of the guide with the front opening of the presser foot.
4. Tighten the screw.
5. Insert tape or braid into the spiral opening of the guide.
6. Insert tape or braid into the front opening of the presser foot and place the tape under the presser foot, keeping the tape out of the needle clearance area.

Start sewing slowly.

NOTE: Guide fabric only, not the tape. If necessary, stop machine to untangle tape so it flows freely and tangle free through the spiral opening.



FOR THE LOVE OF SEWING